




## CA 200P4/24V



- Max power output @24V:  
**4x 300W/4Ω or 2x 1000W/4Ω** (bridged)
- RMS output @24V:  
**4x 100W/4Ω or 2x 320W/4Ω** (bridged)
- Brushed aluminium heatsink
- RCA line input
- High level input
- Bass Boost (0-6-12dB • 45Hz)
- Variable input sensitivity
- Overload and thermal protection
- Dimensions: 380(W) x 151(D) x 50(H) mm



- Max power output @24V:  
**4x 300W/4Ω ou 2x 1000W/4Ω** (avec pont)
- Puissance de sortie RMS @24V:  
**4x 100W/4Ω ou 2x 320W/4Ω** (avec pont)
- Dissipateur thermique en aluminium brossé
- Entrée de ligne RCA
- Entrée niveau haut
- Amplification des basses (0-6-12dB • 45Hz)
- Sensibilité d'entrée variable
- Protection de surcharge et thermique
- Dimensions: 380(l) x 151(p) x 50(h) mm

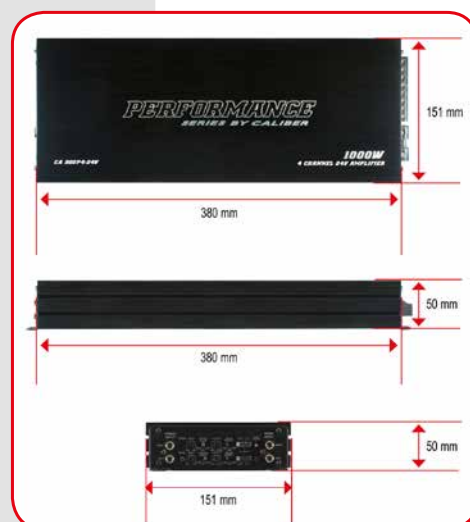

### CALIBER EUROPE BV

Kortakker 10 • 4264 AE Veen  
The Netherlands • Tel: +31 416-699 000



[www.caliber.nl](http://www.caliber.nl)